

LDP-C 18-05

Driver for High Power Laser Diodes

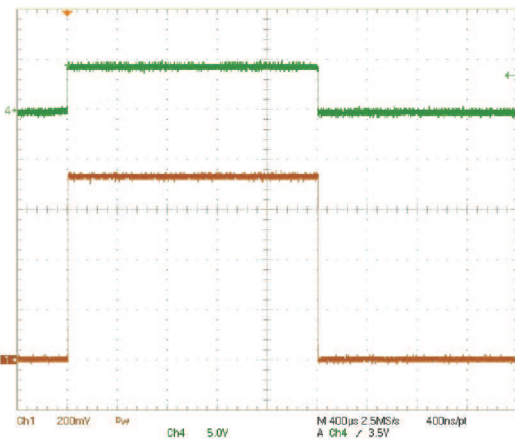
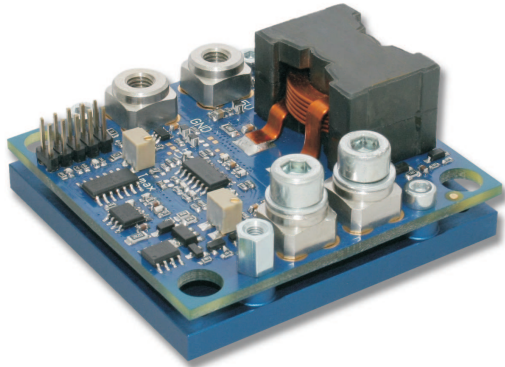


Figure: Current monitor output, scale: 5 A/Div

Product Description:

The LDP-C 18-05 OEM is a very affordable, compact and efficient current supply to drive e.g. the OSRAM Sirilas (registered trademark of OSRAM).

The pulsing capability ranges from single pulses over several hundred kilohertz repetition frequency up to continuous operation. Besides pulsing the diode, analog modulation of the output current is also possible. Its intended field of application is laser soldering and welding as well as generic surface treatment.

The innovative current regulation concept of the LDP-C 18-05 produces, compared to the commonly used linear regulation concept, considerably less losses. Hence only one supply voltage is needed for the control logic and the power stage. The current consumption drawn from the power supply only needs to cover the average laser power and is typically much less than 18 A.

- Output current: 1 .. 18 A
- Output current between pulses: 0 A
- Compliance Voltage: 1 .. 5 V
- Coverage of both cw and qcw range
- Analog modulation up to 16 kHz
- Half-Brick size OEM-Module
- Several protective features
- Adjustable current rise time
- High efficiency

Technical Data:*

Output current	1 .. 18 A
Max. compliance voltage	5 V
Typ. pulse rise time (10 A)	400 ns .. 1 µs (adjustable)
Typ. pulse trigger delay	200 ns **
Min. pulse duration	< 1 µs
Max. pulse duration	cw
Max. repetition rate	500 kHz
Current ripple	< 200 mA, > 400 kHz
Current overshoot	< 1 %
Analog modulation (5 A _{pp})	< 16 kHz
Current settling time (full-scale)	< 150 µs
Pulse trigger input	5 V TTL into 500 Ω
Current setting input	0 .. 0.72 V external (25 A/V)
Current monitor	25 A/V
Voltage monitor	0.1 V/V
Supply voltage	4 .. 6 V DC (at least 1 V above compl. voltage)
Max. power dissipation	12 W
Dimensions in mm	60.9 x 57.8 x 54
	Half-Brick size
Weight	194 g
Operating temperature	0 to + 55 °C

* Specifications measured with a fast recovery diode instead of a laser diode. Technical data is subject to change without further notice.

** Max 2 µs at longest rise time

Designed to shield your laser diode from damage, the LDP-C 18-05 features a number of powerful protective safeguards:

- Innovative current regulation concept actively prevents laser diode from overshoots and over-current
- Integrated Soft Start
- Protection against transients through regulated current rise time
- Over-temperature shutdown
- Enable/Disable input
- Pulsar status output
- Shunt MOSFETs short the output clamps in case of an error
- Protection of the laser diode against reverse currents

Optional Accessories: LDP-C-BOB